



LEAKAGE CURRENT METERS AND PROBES

AC Leakage Current Probe

Model 2620

Check for leakage and locate insulation breakdowns on live circuits

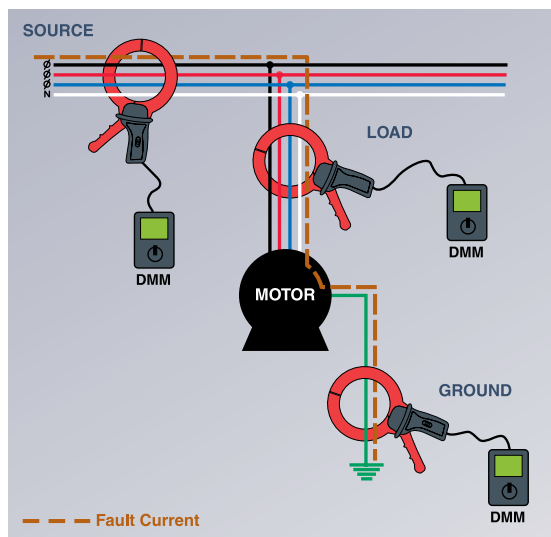

Jaw Opening: 4.4" (112mm)
Conductor Size: 4.4" (112mm)



SPECIFICATIONS

MODEL		2620	
ELECTRICAL			
		4A Range	400A Range
Current Range		500μA to 4A	500mA to 400A
Output Signal		1mV/mA (4V max)	1mV/A (400mV max)
Accuracy	500μA to 10mA	3% of Reading ± 1mV	—
	10mA to 100mA	0.5% of Reading ± 0.5mV	—
	100mA to 4A	0.5% of Reading ± 0.5mV	—
	500mA to 10A	—	0.5% of Reading ± 0.5mV
	10A to 100A	—	0.35% of Reading ± 0.5mV
	100A to 400A	—	0.35% of Reading ± 1mV
Phase Shift	500μA to 10mA	<15°	—
	10mA to 100mA	<10°	—
	100mA to 4A	—	<1°
	500mA to 10A	—	<0.6°
Load Impedance		1MΩ min	1MΩ min
Frequency Range		48 to 1000Hz	48 to 1000Hz
MECHANICAL			
Dimensions		11.22 x 6.89 x 1.77" (285 x 175 x 45mm)	
Weight		2.87 lbs (1300g)	

FEATURES

- Very high sensitivity
- Differential or leakage current from 500 μ A
- Current up to 400A
- Two switch-selectable measurement ranges: 4AAC/400AAC
- Large inside jaw diameter allows use on large or multiple conductors
- Works with single-, dual- and three-phase systems
- Connect directly to DMMs on mV or VAC range

CATALOG NO. DESCRIPTION

2125.52 AC Leakage Current Probe Model 2620 (4A-1V/A, 400A-1mV/A output)

Accessories (Optional)

1971.01 Artificial Neutral Model AN-1